



RESIDENTIAL SEPTIC TANKS

ACCEPTED BY UPC®

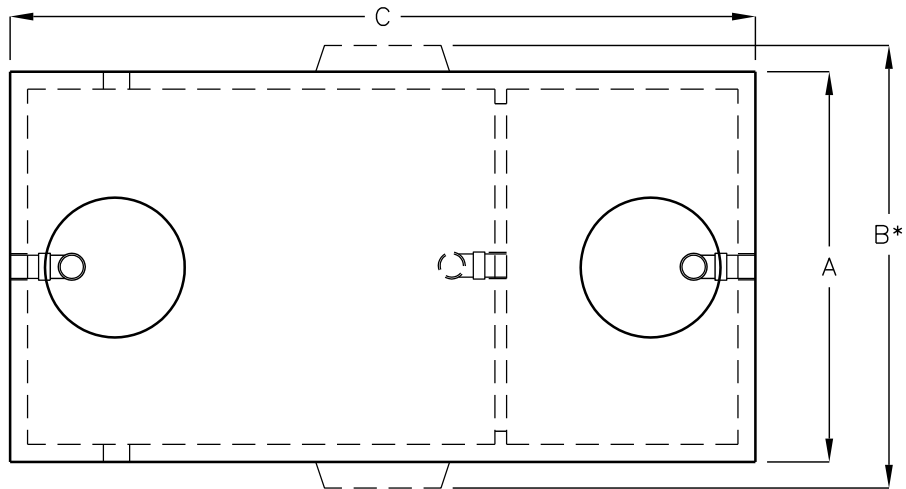

TOP VIEW

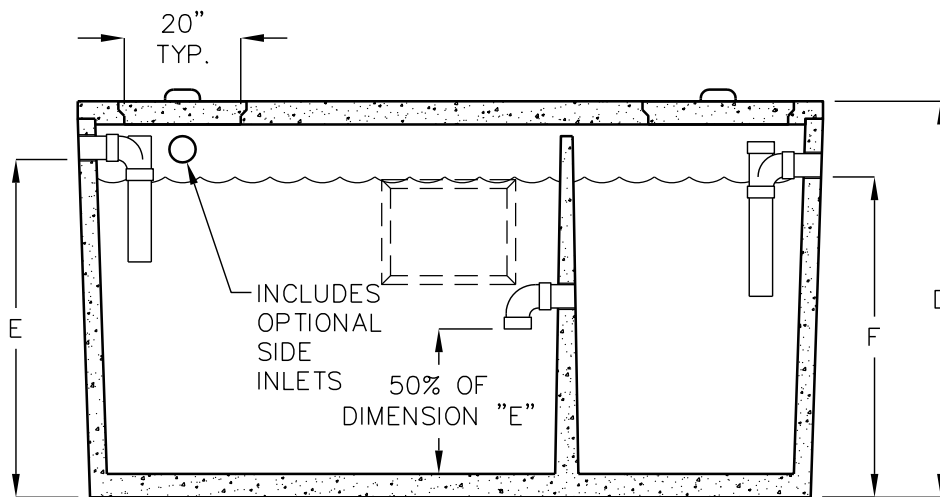

SIDE VIEW

| MODEL NUMBER | LIQUID CAPACITY (GALLONS) | DIM A | DIM B* | DIM C | DIM D | DIM E | DIM F | MINIMUM EXCAVATION WIDTH* | MINIMUM EXCAVATION LENGTH |
|--------------|---------------------------|--------|--------|---------|-------|--------|-------|---------------------------|---------------------------|
| JS-750 | 750 | 4'-0" | 4'-9" | 8'-1" | 5'-8" | 4'-10" | 4'-7" | 5'-9" | 9'-1" |
| JS-1000 | 1000 | 5'-1" | 5'-10" | 8'-2" | 5'-8" | 4'-10" | 4'-7" | 6'-10" | 9'-2" |
| JS-1200 | 1200 | 5'-9" | 6'-6" | 8'-6" | 5'-8" | 4'-10" | 4'-7" | 7'-6" | 9'-6" |
| JS-1500 | 1500 | 5'-7" | 6'-4" | 10'-8" | 5'-8" | 4'-10" | 4'-7" | 7'-4" | 11'-8" |
| JS-2000 | 2000 | 4'-11" | 5'-8" | 15'-11" | 5'-8" | 4'-10" | 4'-7" | 6'-8" | 16'-11" |
| JS-2500 | 2500 | 5'-9" | 6'-6" | 16'-10" | 5'-8" | 4'-10" | 4'-7" | 7'-6" | 17'-10" |
| JS-3000 | 3000 | 5'-9" | 6'-6" | 16'-10" | 6'-5" | 5'-7" | 5'-4" | 7'-6" | 17'-10" |

DESIGN LOAD: NON TRAFFIC - 3' OF EARTH COVER MAXIMUM AT 500 PSF *WITH SIDE WALL LIFTING INSERTS
 FOR COMPLETE DESIGN AND PRODUCT INFORMATION, CONTACT JENSEN PRECAST.

ON THE WEB AT JENSENPRECAST.COM